



Your local dealer:



ROTAR INTERNATIONAL BV

SCHERING 27 | 8281 JW GENEMUIDEN | NETHERLANDS

POSTBUS 174 | 8280 AD GENEMUIDEN | NETHERLANDS

TEL. +31 (0) 38 385 5471 | FAX. +31 (0) 38 385 5402

E-MAIL: INFO@ROTAR.COM | WWW.ROTAR.COM

## Material-Handling

### ► RSR-RCR Series



#### RSR Rotar Standard Rotator

Rotar designed some Standard Rotator Heads to be installed on different kind of constructions, to be mounted with a hammer top-plate on the excavator side. Specially designed to be used with bucket kinematic. Standard integrated with hydraulic swivel. Rotator is based on a bearing principle with a hydraulic motor

Typ RSR	Machine class (t)	Weight (kg)	Hole-pattern
9	5-9	140	110-120
22*	10-22	215	130-140
28*	20-28	300	140-150
48*	25-48	350	140-150

\* optional with 2 hydraulic motors



#### RCR Rotar Compact Rotator

The Rotar Compact Rotators are designed for single pin mounted constructions, like orange peel grapples, wood grapples etc. This rotator is also based on a bearing principle with an external motor. Standard with integrated swivel. Easy mounting – Easy to service.

Typ RCR	Machine class (t)	Weight (kg)	Max. lifting (t)*
20	15-45	205	10
25	30-70	245	20

\* dynamic load



Your Attachment Supplier


## Recycling

### ► EVB-Series

#### EVB Rotar Segregator Bucket

4 sizes available for excavators of 13 up to 40 ton. Ideally to clean construction- and demolition sites as well to screen or clean roughly all kind of materials. Easy to install / easy to operate.

- HD-construction
- Optional central greasing system
- Also available with bucket teeth's

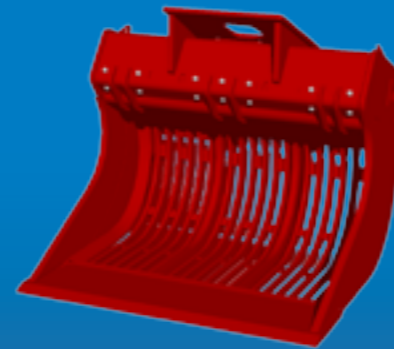

Typ EVB	Machine class (t)	Weight (kg)	Capacity (l)	Distance between ribs (mm)
600 S	13-16	1100	600	45
800 S	15-25	1475	800	45
1200 S	21-35	1885	1200	45
1200 I	24-40	1900	1200	80

\* system protected by flow control valve



Your Attachment Supplier


## Recycling

### ► HEX-Series

#### HEX Rotar Cleaner

A program of 5 different sizes suitable to excavators of 7 up to 35 ton. A multifunctional attachment for screening, washing, mixing, separating etc. Ideally to screen demolition and construction waste. Also for cleaning contaminated soils

- Interchangeable insert screens (# 6-45 mm)
- Simple installation / operation
- Service friendly

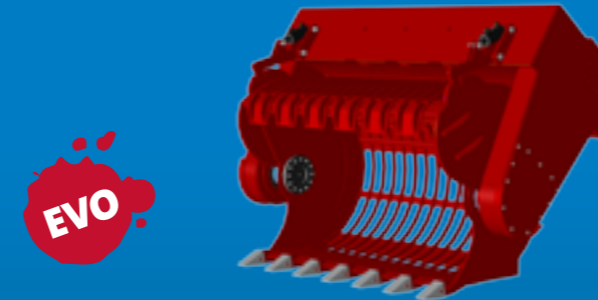

Typ HEX	Machine class (t)	Weight (kg)	Capacity (l)	Distance between ribs (mm)
350 M	7-12	425	350	45
700 S	13-15	900	650	45
850 S	15-20	1200	870	60
1000 S	20-25	1700	1050	60
1400 S	25-35	2150	1450	60

\* NEW EVO Operation system (no electric anymore)  
Only grab/shear circuit required



Your Attachment Supplier


## Recycling

### ► RVB-Series

#### RVB Rotar Segregator Bucket

5 different sizes are available for wheeled loaders of 4,5 up to 15 ton. Ideally to separate fast and easy all kind of materials. To clean job sites or to screen (road) construction waste, it's all where this bucket is made for.

- Extremely effective
- 42 mm distance between vertical ribs
- Central greasing (optional)
- Simple installation / operation
- Removable side-plates

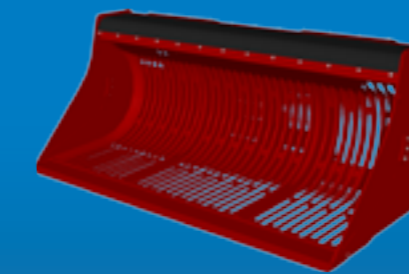

Typ RVB	Machine class (t)	Weight (kg)	Capacity (l)	Bucket width (mm)
800 S	4,5-7,5	860	1025	2060
950 S	6-9	950	1155	2320
1500 S	7,5-10	1500	1650	2420
2000 S	10-12	1800	2050	2650
2300 S	12-15	2260	2225	2730

\* system protected by flow control valve



Your Attachment Supplier


## Recycling

### ► HPL-Series

#### HPL Rotar Cleaner

7 sizes will fit to wheeled loaders of 4 up to 20 ton. Suitable for screening construction and demolition waste, compost, cleaning of construction sites, beaches, graveyards etc.

- Interchangeable Insert screens (# 6-45 mm)
- Simple installation / operation
- Multifunctional attachment. (screening/mixing/washing)

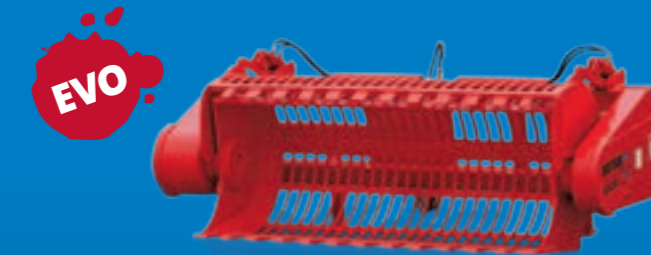


Typ HPL	Machine class (t)	Weight (kg)	Capacity (l)	Distance between ribs (mm)
400 M	4-6	385	400	45
600 S	5-7	675	600	45
800 S	6-10	875	800	45
1500 S	10-13	1700	1560	45
2000 S	12-16	2200	2000	45
2500 I	15-18	2544	2500	60
3000 I	17-20	2780	3000	60

\* NEW EVO Operation system (no electric anymore)  
Only one additional circuit required (reversible)



Your Attachment Supplier

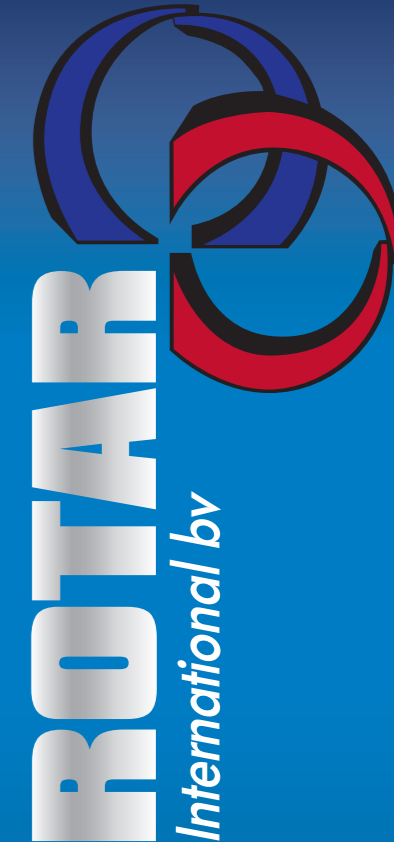

### ► Program



Your Attachment Supplier



Your Attachment Supplier

## Demolition

### RHB-Series

#### RHB Rotar Hydraulic Hammer

A new generation hydraulic breakers, who deserve their excellent reputation by simplicity and performance. They are one of the most silent breakers and in line with the "Outdoor Equipment" directive 2000/14/EU.

The RHB-breakers are standard fitted with a power booster, which results in better performances.

Features:  
Hybrid technology (gas/oil), highly efficient internal control valve, Power stop function



Type RHB	Machine class (t)	Weight (kg)	Blow frequency (bmp)	Tool diameter (mm)
RHB 20	1,3 - 3,0	117	560 - 1700	42
RHB 30	2,1 - 4,5	166	670 - 1450	52
RHB 40	2,9 - 6,0	233	520 - 1150	62
RHB 60	4,2 - 9,0	284	530 - 1150	70
RHB 80	5,2 - 12,0	380	530 - 1050	80
RHB 110	9,0 - 15	550	590 - 1100	80
RHB 140	10 - 17	800	650 - 850	100
RHB 180	15 - 24	1200	550 - 720	120
RHB 220	17 - 28	1500	520 - 680	135
RHB 260*	20 - 33	1800	380 - 650	140
RHB 300*	25 - 40	2200	380 - 620	150
RHB 380*	29 - 46	2600	380 - 590	155
RHB 460*	29 - 46	3000	380 - 580	165
RHB 540*	45 - 70	4200	350 - 560	180

\* Power control: The blow frequency and impact energy can be adjusted  
\*\* Optional: a wide range of tools / original tool grease

## Material-Handling

### RG-Series

#### RSG Rotar Sorting-/ Demolition Grab

A heavy duty built grab line with a double framed main housing and HD pivot groups. Suitable to excavators of 2 up to 65 ton. 360° endless rota table and also available without rotation. Standard fitted with interchangeable cutting edges and a load control valve.

- \* Extreme reliable
- \* Max. safety
- \* Long lasting



Typ RG	Machine class (t)	Weight (kg)	Capacity (l)	Closing force kN.*
RG 5	2-5	210	100	12
RG 9	5-9	425	140	26
RG 12	10-15	850	325	41
RG 15	14-18	950	400	41
RG 22	16-22	1305	530	53
RG 28	20-28	1550	620	61
RG 37	25-37	1954	875	70
RG 48	35-48	2285	1100	80
RG 60	45-60	3860	1500	115

\* Closing force at 320 bar

## Demolition

### RDP-Series

#### RDP Rotar Pulveriser

Recently Rotar extended their product line by 4 sizes of rota table Pulverisers. A compact design creates an excellent stability on the excavator. Built to be used for primary- as well as secondary demolition.

- Good penetration
- Fast cycle (open /close)
- Interchangeable wear parts (*max. flexibility*)
- 360° Endless rota table



Typ RDP	Machine class (t)	Weight (kg)	Jaw opening (mm)	Cutting force (t)
20	15-25	2100	845	62/100
25	22-35	2765	974	70/107
32	32-50	3100	1000	95/152
42	45-65	4500	1230	105/195

\* Cutting force at 350 bar

## Demolition

### RDC-Series

#### RDC Rotar Combi Shear

A range of 4 different sizes is available for machines from 15 up to 65 ton. Because of the compact design, it's the perfect shear to be used on high reach machines. Built for primary demolition of concrete / steel constructions.

- Good penetration
- Fast cycle (open / close)
- Interchangeable wear parts (*max flexibility*)
- 360° Endless rota table



Typ RDC	Machine class (t)	Weight (kg)	Jaw opening (mm)	Cutting force (t)
20	15-25	1950	750	63-80
25	22-35	2670	900	68-100
32	30-45	3050	955	85-125
42	45-70	4100	1230	102-140

\* Cutting force at 350 bar

## Scrap - metal

### RSS-Series

#### RSS Rotar Scrap Shear

Rotar develops a range of 5 models scrap shears suitable to excavators of 20 up to 75 ton. Those shears can be mounted on the mono boom as well as on the stick.

- Excellent performance
- High value construction
- Unique piercing tip (*max protection*)
- Efficient hydraulic installation



Typ RSS	Machine class (t)	Weight (kg)	Jaw opening (mm)	Cutting force (t)
20	16-24	2470	445	531
30	18-30	3590	607	644
40	24-38	4440	760	813
50	30-50	6180	782	955
100	45-75	8250	947	1338

\* Cutting force at 350 bar

## Material-Handling

### RPG-Series

#### RPG Rotar Polyp Grabs

A full range of grabs are available with open / half open / closed shells. Suitable to excavators of 16 upto 70 ton. 360° endless rotation. Optional also in 4 tyne version available.

- HD-construction
- Robust pivot groups
- Rotator head based on bearing concept



Typ RPG	Machine class (t)	Weight (kg) *	Capacity (l)	Max. load (t)	Rotator (t)
4-600	16-30	1675	600	8	20
4-800	16-30	1725	800	8	20
6-600	30-50	1950	600	10	25
6-800	30-50	2030	800	10	25
6-1000	30-50	2250	1000	10	25

\* Weight based on half-open shells  
- Pin adapter ø70 mm

## Scrap - metal

### RRC-Series

#### RRC Rotar Rail Cutter

Rotar extended their range of attachments with a Rail Cutter. An extreme powerful shear, designed to cut Rail Tracks. Those shears are used on scrap yards for recycling as well during replacement operations in the field. A special design of the jaws, with interchangeable blades, creates an easy cut.

- Extreme strong construction
- Strong hydraulic performance
- Unique blades solution
- 360° Rotation



Typ RRC	Machine class (t)	Weight (kg) *	Jaw opening (mm)	Jaw Depth (mm)
20*	15-25	2500	*	*
25	25-38	3500	204	111-190

\* Under construction