




At the heart of the QA441 is the Patented Doublescreen box, featuring two independent double deck screen boxes. The primary screen works as a fines extractor, whilst the secondary screen operates as a grader. Two processes combined on one plant, both primary & secondary screening angles can be adjusted relative to each other. The QA441 offers a screening solution no other mobile double deck screener can provide as its two screen boxes offer an unsurpassed level of separation on a wide range of materials, at very high rates of production.

Technical specifications

	QA441
Screen	
Type	2 off screenboxes, 2 Bearing 2 Deck
Screen box size	20' x 5' / 6 x 1.5m
Tensioning System	Manual Ratchet
Speed	1200rpm
Throw	7.24 mm
Motor	49.1 cc x 2 off

	QA441
Power Pack	
Engine Type	CAT C4.4 74.5 kw / 100 hp
Diesel Tank Size	290 litres / 76.5 USG
Hydraulic Tank Size	370 litres / 98 USG

Note. All weights and dimensions are for standard units only

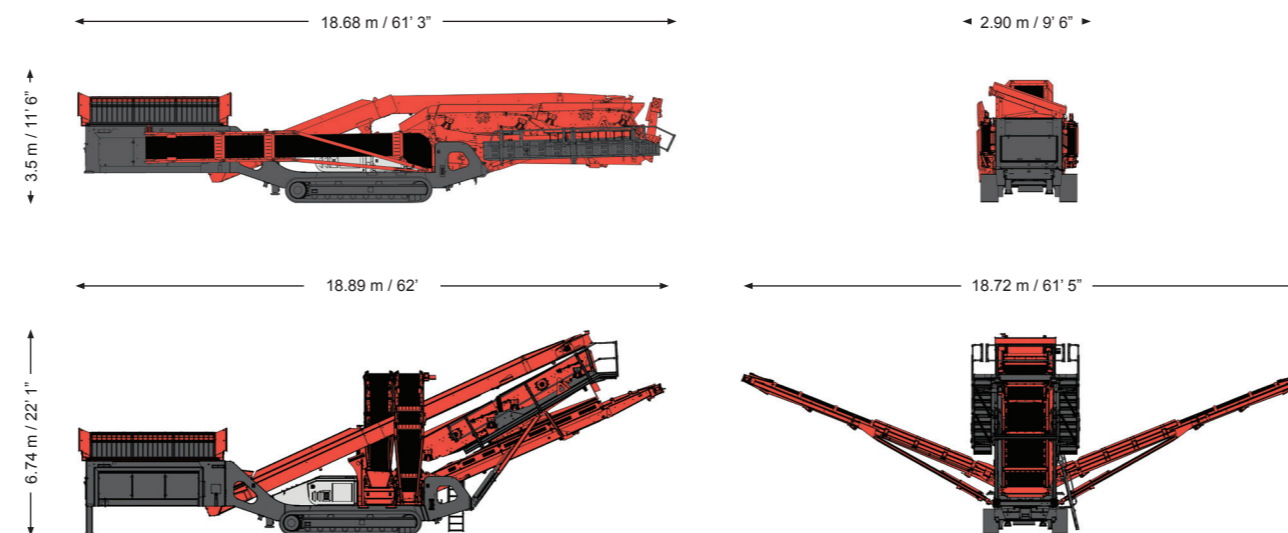

Standard weight 30,300 kg / 66,800 lbs



SANDVIK CONSTRUCTION MOBILE CRUSHERS AND SCREENS LTD
 HEARTHCOTE ROAD, SWADLINCOTE, DERBYSHIRE, DE11 9DU, ENGLAND
 T: +44 (0) 1283 212121 F: +44 (0) 1283 818210 info.mobilecs@sandvik.com www.sandvikmobiles.com

The material in this brochure is of general application for information and guidance only, and no representation or warranty is made or given by the manufacturer that its products will be suitable for a customer's particular purpose and enquiry should always be made of the manufacturer to ensure such suitability. Whilst every effort has been made in the preparation of this document to ensure its accuracy, the manufacturer assumes no liability resulting from errors or omissions in this document, or from the use or interpretation of the information contained herein. The manufacturer reserves the right to make changes to the information in this brochure and the product design without reservation and without notification to users.

QA441 Doublescreen

E-motion

The Ultimate Screening Solution



BB-335-ENG-mez © Sandvik Construction 2013 SANDVIK is a registered trademark owned by Sandvik Intellectual Property AB in Sweden and other countries



QA441 Doublescreen

Engineering in motion

KEY SPECIFICATIONS

SCREEN BOX	20' x 5' / 6 x 1.5m
ENGINE	C4.4 74.5 kW / 100 hp
TRANSPORT DIMENSIONS	18.68m / 61' 3" (l) 2.90m / 9' 6" (w) 3.50m / 11' 6" (h)
WEIGHT	30,300 kg / 66,800 lbs

ULTIMATE SCREENING SOLUTION

Featuring the patented, world-class heavy duty Doublescreen screen box from Sandvik, the QA441 is the ideal solution for large-scale aggregates producers requiring large throughput and high screening accuracy.

Two high velocity screens that work independently to each other, the primary screen works as a fines extractor, whilst the secondary screen operates as a grader. Two processes combined on one plant, both primary & secondary screening angles can be adjusted relative to each other.

User-friendly features include an updated feeder hopper & feeder drive, an "easy to use" control system with sequential start-up. The QA441 lends itself to many applications including iron ore, aggregates, topsoil, recycling, minerals, coal, sand and gravel.

FEATURES INCLUDE:

- High production capabilities due to its phenomenal Doublescreen system - two in-line, independently vibrating 10' x 5' double deck screenboxes.
- Primary screen works as a fines extractor, whilst secondary screen operates as a grader
- Large volume hopper complete with remote control hydraulic tipping grid.
- User friendly control panel with sequential start-up for ease of operation
- Hydraulically folding 3 sided walkways for ease of maintenance
- Wide range of optional extras to suit different applications
- Machine designed for optimum fuel economy and low operating costs.

Main Conveyor

- 1000mm / 39" wide variable speed conveyor
- Hydraulic raise/lower facility to enable quick mesh change and maintenance

Screenbox

- Double deck 20' x 5' / 6m x 1.5m equivalent patented Doublescreen for high production capabilities
- Adjustable screen box dependent on the type of screening required
- Easy-change mesh facility with highly efficient ratchet tensioning system
- Hydraulically folding three sided walkway for ease of maintenance

Side conveyors x 2

- 700 mm / 28" wide belt with a discharge height of 5080 mm / 16'8" for massive stockpiling capability

Fines tail conveyor

- 1200 mm / 47" wide belt with a discharge height of 4988 mm / 16'4" for massive fines stockpiling capability

Chassis

- Hydraulic legs for increased stability and servicing capabilities

Tracks

- 500 mm / 20" wide tracks driven by radio control as standard for ultimate maneuverability

Hopper

- Large volume hopper complete with remote control hydraulic tipping grid
- Variable speed belt feeder, heavy duty-roller bed and belting
- Heavy duty feeder drive system for large throughput
- Vibrating grid available as an option

Power Pack

- 74.5 kW / 100hp emissions compliant diesel engine
- User friendly push button control panel with sequential start-up for ease of operation
- Easy access to the engine compartment for service and maintenance



Suitable for a wide variety of applications.




Quarrying application

Aggregates application

Construction application

STANDARD FEATURES

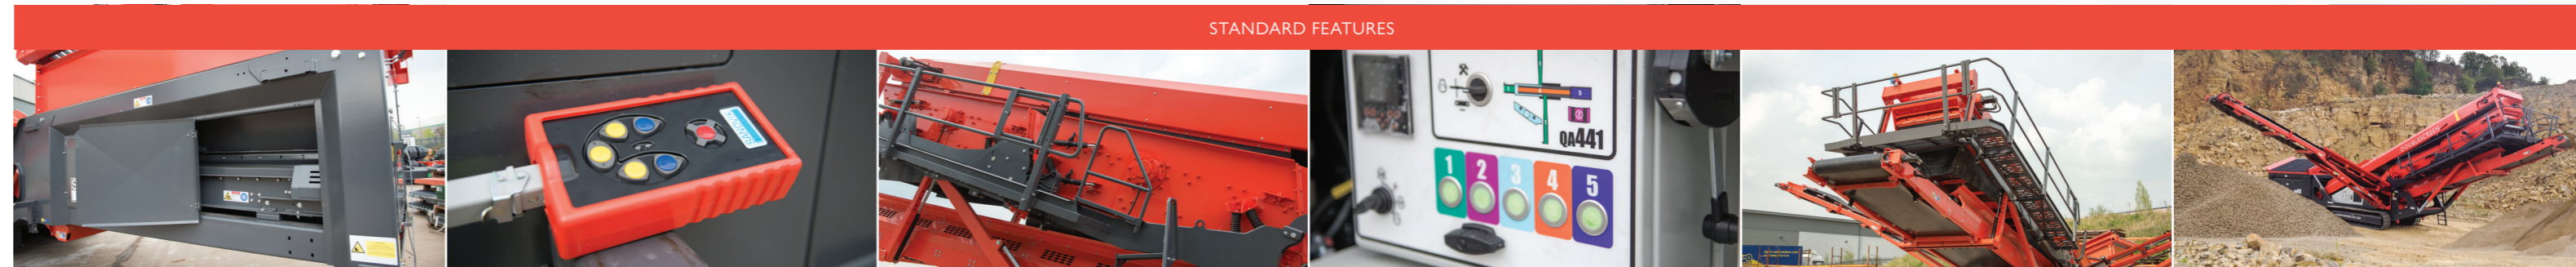

Redesigned feeder hopper for easier access

Remote control for ease of mobility

Patented double deck Doublescreen technology

Colour coded control panel for ease of operation

Three sided walkway around main conveyor

Massive stockpiling capabilities